

GANJ[®] AUTOCLAVE

23L Q71B-C



GANJ Autoclave 23L

Q71B-C


GANJ series is an entry-level cost-effective sterilizer which is safe and reliable. The operation is convenient and simple and it also guarantees a better drying results. Functions such as record reprinting, emergency stop and emergency door opening are fully equipped to meet daily basic needs.

Q61B



Personalized interface

GANJ series adopts a color LCD display screen, It is possible to set cycle parameters to meet specific needs.

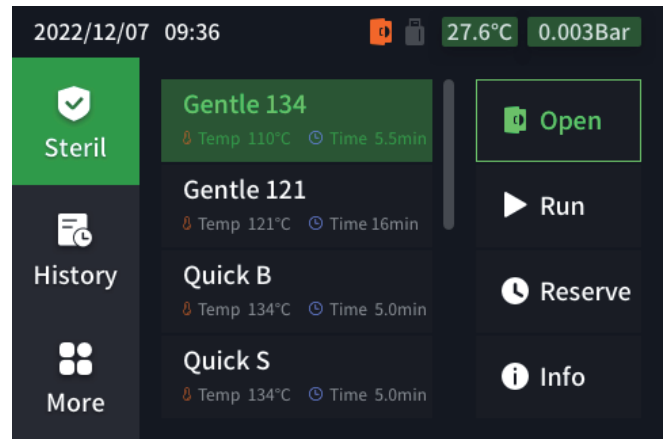


Vacuum level -0.90bar

The vacuum pump (capable of achieving a vacuum of -0.90bar), ensuring high quality sterilization and long term performance of your Hatmed autoclave.



Patented steam generator

Independent steam generator produces saturated steam quickly. The sterilization is effective and thorough and can pass strict Helix and B&D testing.

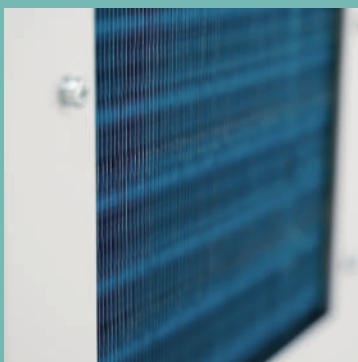

Optimal drying results

Equipped with an efficient condensing system to ensure the dryness of loads such as paper plastic packaging and cotton fabric wrapping.



Various sterilization programs

There are multiple programs to choose from, Standard programs meet daily sterilization needs, Fast programs are used for rapid turnover of instruments and custom programs can set parameters to meet various needs.

Full featured

Configured with safety door lock, automatic water quality monitoring, automatic fault monitoring, etc to ensure safe use; Equipped with emergency stop, emergency door opening and other functions to meet daily needs.



Locking safety device

Locking safety device ensures that the door can not be opened during the sterilization process, avoiding steam spraying and scalding operators, and making it easier to open and close the door.

Water quality monitor

The water quality detecting system gives out alarm and stops the sterilization cycle to prevent impurities which would harm the equipment.

External water tank

With an external water tank, distilled water is fed from external water reservoirs automatically. After one cycle, there is no need to clean the water tank and discharge the waste water regularly.



Emergency door switch

If the sterilizer is powered off during normal operation, the chamber automatically recovers to normal pressure allowing the loads to be taken out safely and timely by an emergency door button or by waiting for electricity restoration.



Rotating steel wire basket

GANJ 23L autoclave adopts a rotatable steel wire basket, which comes standard with 2 layers of pallets. By rotating the steel wire basket, It can hold up to 5 layers of pallets



Intelligent load detection

With intelligent load detection, the required time, water, and power can be calculated precisely. The device can measure the amount of load and adjust resources to achieve effective sterilization; saving energy and providing an environmentally-conscious solution.



Label printing

Optional label printer can be used to print labels, The expiration date can be set on system. The labels can be pasted on the packaging bag for easy viewing and to avoid package expiration.

Log record


The historical records can be referred by date. Each sterilization record can be directly browsed on screen and a single record can also be reprinted.



Large storage capacity

Optional printer can be used to print sterilization records. GANJ has large capacity storage. The system can store 30,000 sterilization records which can be exported through a memory stick.

Product Measurements Q71B-C

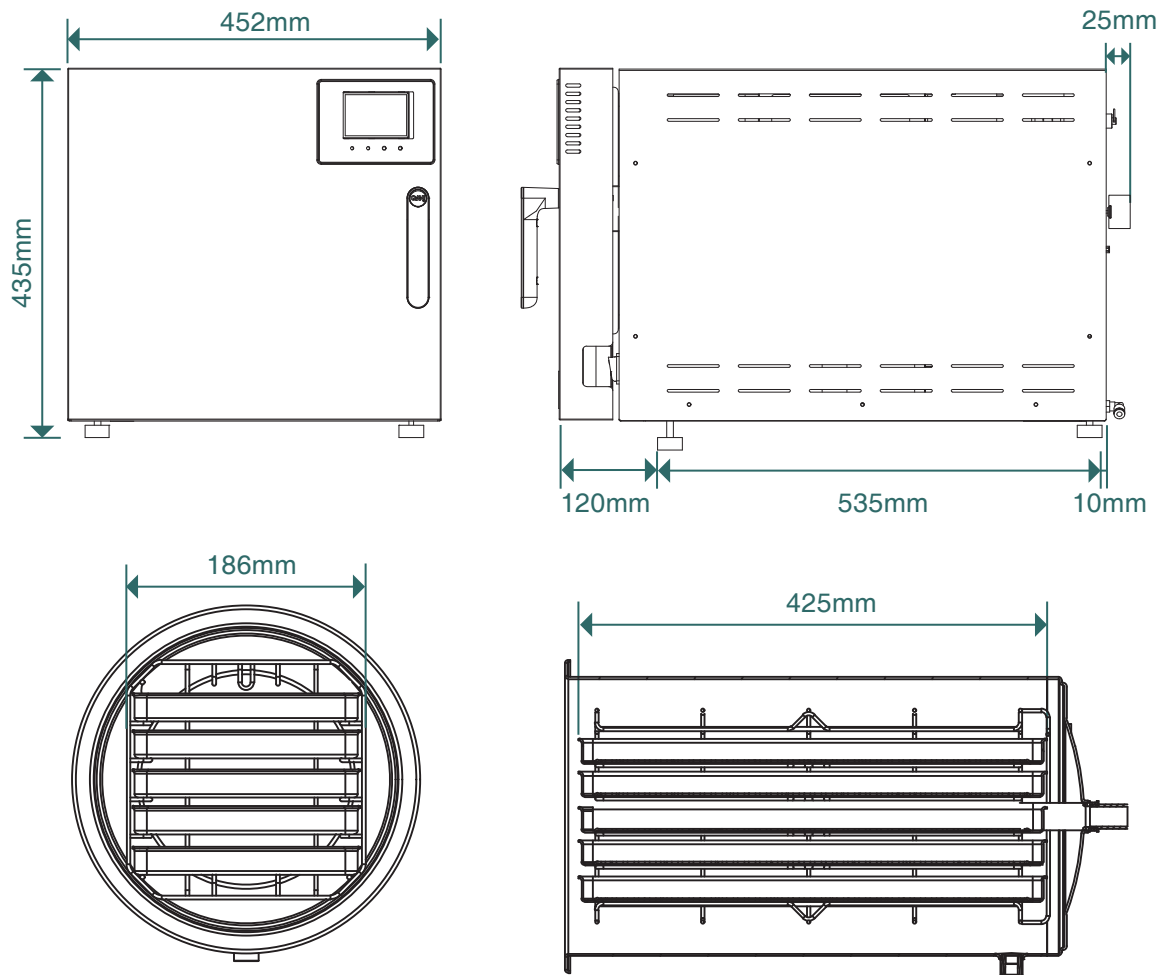

Features

- 3-time pre-vacuum
- Vacuum drying
- Pre-heat feature
- Emergency stop
- Smart load monitor system
- Embedded control system
- Intelligent error detection
- Innovative jog-dial knob
- Power off Protection
- Built-in large memory
- Water quality monitor
- Custom program
- Manual lock
- 9 programs
- Automatic upgrade with USB driver

Accessory



Label or LOG printer(optional)



Tray



Air filter



Tray clamp

Product Measurements

Model	Q71B-C
Vol	23L
Screen	LCD display
Door Lock	Electrical Safety Door
Device Dimensions	452mm(W)*435mm(H)*665mm(D)
Chamber Dimensions	∅ 253mm*460mm
Weight	47KG
Power	2500W , 220V/50Hz or 110V/60Hz
Data Interface	USB/RS232
Printer	External Printer (Optional)
Water tank	External water tank
Tray	2 Layers Tray
Vacuum level	-0.90bar
Residual Humidity	< 0.1%

Note: All technical data, programs, configuration may vary with models. HaeTmed reserves the right to modify technical parameters without prior notice.

Contact Us

Germany
HäTmed GmbH
Sternstraß 67 40479 Düsseldorf Deutschland/Germany

Tel: +49 211 1645 9576
Fax: +49 211 1645 9359
Email: info@haetmed.de
www.haetmed.de

China
HeaTmed(Wuxi) Co.,Ltd
6th Floor, Building 7 , Area C , 1699# Huishan Avenue,
Huishan District,Wuxi Jiangsu Province,214174,P.R.China

Tel: +86 510 66682078
Fax: +86 510 66682079
Email: info@haetmed.de
www.haetmed.de